


Priključci za vazduh od nerđajućeg čelika (316 L)


- Priključci od nerđajućeg čelika (316 L) sa zaptivkama od FKM
- Jednostavno spajanje
- Jednostavno rastavljanje
- Visoka sigurnost spoja
- Namereni za primenu u prehrambenoj, farmaceutskoj, hemijskoj industriji za rad u agresivnim okruženjima i za rad na povišenim temperaturama
- Pogodni za upotrebu kod različitih tipova pneumatskih creva

Tehničke karakteristike

- Radni medijum: Vazduh, voda
- Radni pritisak: 0 do 18 bar
- Vakuum max: -0,99 bar
- Radna temperatura: -20 °C do +150 °C

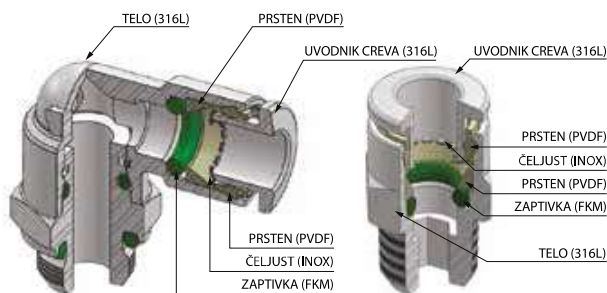


Priključak ravni tip SUS-PC-R navoj




Model	Lager	ØD	T	ØP	I	L	CH	H
SUS-PC-4-R1/8	✓	4	R 1/8	10	8	18.5	10	3
SUS-PC-4-R1/4		4	R 1/4	10	10	20	14	3
SUS-PC-6-R1/8		6	R 1/8	12	8	21	12	4
SUS-PC-6-R1/4		6	R 1/4	12	10	20.5	14	4
SUS-PC-8-R1/8		8	R 1/8	14	8	26	14	5
SUS-PC-8-R1/4	✓	8	R 1/4	14	10	24	14	6

Priključak ravni tip SUS-PC-G navoj



Model	Lager	ØD	T	ØP	I	L	CH	H
SUS-PC-4-M5		4	M5x0.8	10	4	19	10	2.5
SUS-PC-4-G1/8		4	G 1/8	10	5.5	18	13	3
SUS-PC-6-M5	✓	6	M5x0.8	12	5	21	12	2.5
SUS-PC-6-G1/8	✓	6	G 1/8	12	5.5	19.5	13	4
SUS-PC-6-G1/4	✓	6	G 1/4	12	6.5	19.5	16	4
SUS-PC-8-G1/8		8	G 1/8	14	5.5	24.5	14	5
SUS-PC-8-G1/4		8	G 1/4	14	6.5	21.5	16	6

Priključak ugaoni obrtni tip SUS-PL-R navoj



Model	Lager	ØD	T	ØP	I	L1	L2	CH
SUS-PL-4-R1/8		4	R 1/8	10	8	19.5	20.5	13
SUS-PL-6-R1/8		6	R 1/8	12	8	21	20.5	13
SUS-PL-6-R1/4		6	R 1/4	12	10	21	23	14
SUS-PL-8-R1/8		8	R 1/8	14	8	23	20.5	14
SUS-PL-8-R1/4	✓	8	R 1/4	14	10	23	23	14