


## Nepovratni ventili sa deblokiranjem


- Obezbeđuju momentalno zaustavljanje pneumatskog cilindra
- Izrađeni od visoko kvalitetnih materijala, jednostavni za upotrebu
- Omogućuju maksimalnu fleksibilnost u izvođenju svih pneumatskih instalacija u industriji

### Tehničke karakteristike

- Radni medijum: Vazduh  
(ne upotrebljavati za druge gasove ili tečnosti)
- Radni pritisak: 1 do 10 bar
- Radna temperatura: 0 °C do +60 °C

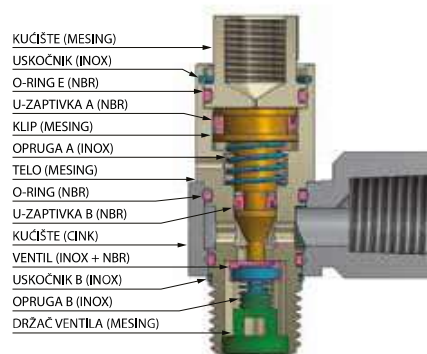


## Ventil nepovratni tip PVSF-R navoj

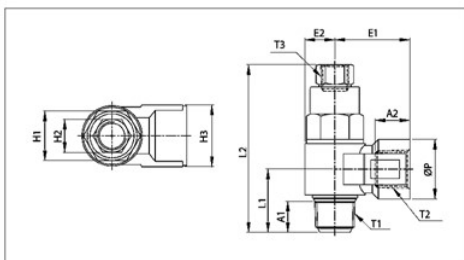

Model	Lager	ØP	T1	A1	T2	A2	T3	L1	L2	E1	E2	H1(Hex)	H2(Hex)	H3
PVSF-R1/8	✓	14.5	R 1/8	7.6	Rc 1/8	10.0	M5	15.4	40.8	18.2	7.3	12	8	15
PVSF-R1/4		18.0	R 1/4	10.6	Rc 1/4	13.0	Rc 1/8	21.1	48.9	26.5	9.5	17	12	19
PVSF-R3/8		23.0	R 3/8	12.6	Rc 3/8	14.5	Rc 1/8	24.8	56.7	30.8	11.6	20	12	24
PVSF-R1/2		26.5	R 1/2	14.5	Rc 1/2	19.0	Rc 1/4	31.0	70.6	38.7	14.0	24	17	28

## Ventil nepovratni tip PVSF-G navoj

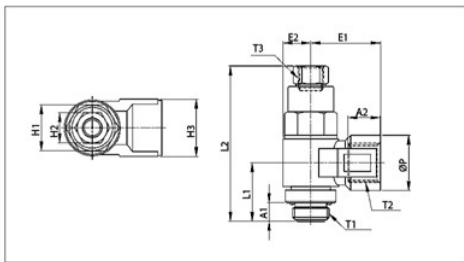

Model	Lager	ØP	T1	A1	T2	A2	T3	L1	L2	E1	E2	H1(Hex)	H2(Hex)	H3
PVSF-G1/8		14.5	G 1/8	5.1	G 1/8	9.5	M5	16.2	40.8	17.7	7.3	12	8	15
PVSF-G1/4	✓	18.0	G 1/4	6.6	G 1/4	12.5	G 1/8	21.3	48.9	26.0	9.5	17	12	19
PVSF-G3/8	✓	23.0	G 3/8	7.2	G 3/8	14.0	G 1/8	24.8	56.7	30.3	11.6	20	12	24
PVSF-G1/2		26.5	G 1/2	8.7	G 1/2	18.5	G 1/4	29.6	70.6	38.2	14.0	24	17	28