


Ručni kuglasti ventili


- Telo i kugla su izrađeni od mesinga
- Površinska zaštita: niklovanje/hromiranje
- Dostupne verzije: unutrašnji/unutrašnji navoj i spoljašnji/unutrašnji navoj
- Pogodni za korišćenje u kombinaciji sa pneumatskim priključcima sa G i R navojima

Tehničke karakteristike

- Radni medijum: Vazduh
- Radni pritisak: 0 do 10 bar
- Radna temperatura: -15 °C do +120 °C

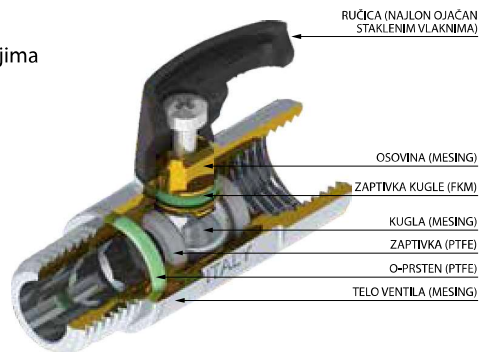


Ventil ručni kuglasti tip VS100

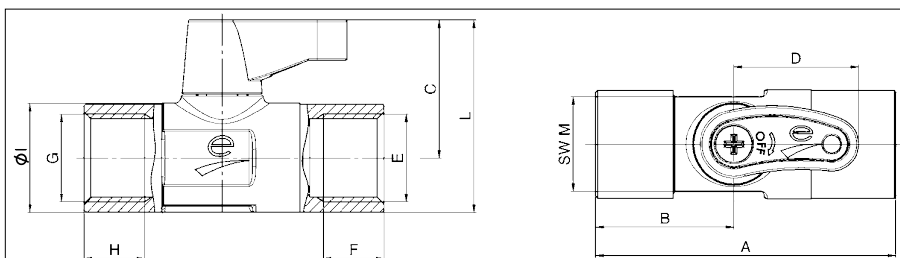

Model	Lager	DN	A	B	C	D	E	F	G	H	ØI	L	SW M
VS100-1/8	✓	6	39.5	19.5	20.5	18.5	G1/8	8	G1/8	8	16.2	28.5	14
VS100-1/4	✓	6	44.5	20.5	20.5	18.5	G1/4	9	G1/4	9	16.2	28.5	14

Ventil ručni kuglasti tip VS110

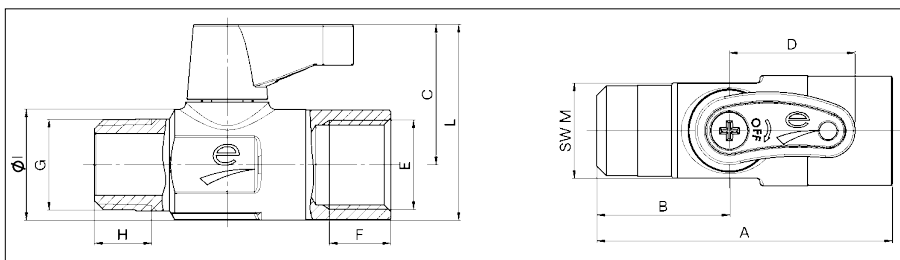

Model	Lager	DN	A	B	C	D	E	F	G	H	ØI	L	SW M
VS110-1/8	✓	6	38	17	20.5	18.5	G1/8	8	R1/8	7	16.2	28.5	14
VS110-1/4	✓	6	43.5	19.5	20.5	18.5	G1/4	9	R1/4	8.4	16.2	28.5	14