


Ručni kuglasti ventili


- Telo i kugla su izrađeni od mesinga
- Površinska zaštita: niklovanje/hromiranje
- Dostupne verzije: unutrašnji/unutrašnji navoj i spoljašnji/unutrašnji navoj
- Pogodni za korišćenje u kombinaciji sa pneumatskim priključcima sa G i R navojima

Tehničke karakteristike

- Radni medijum: Vazduh
- Radni pritisak: 0 do 10 bar
- Radna temperatura: -10 °C do +70 °C

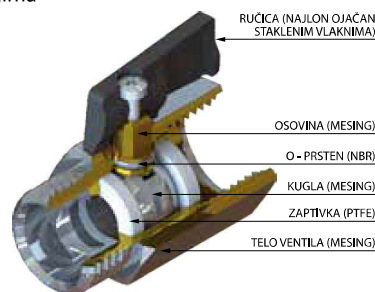


Ventil ručni kuglasti tip VS400

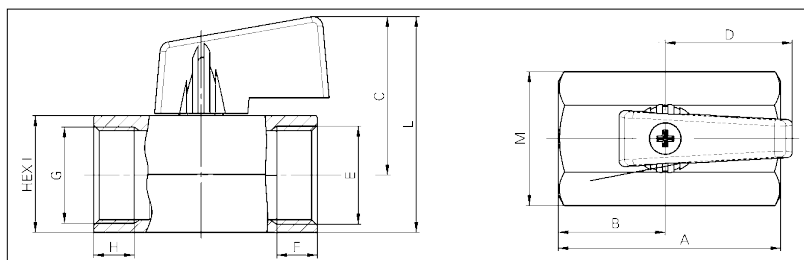

Model	Lager	DN	A	B	C	D	E	F	G	H	HEX I	L	M
VS400-1/8	✓	8	39	18	27	22	G1/8	7.5	G1/8	7.5	20	37	23
VS400-1/4	✓	8	39	18	27	22	G1/4	9	G1/4	7.5	20	37	23
VS400-3/8	✓	8	42	21	27	22	G3/8	10	G3/8	10	20	37	23
VS400-1/2	✓	10	47	21	29.5	22	G1/2	12	G1/2	10	24	41	28
VS400-3/4	✓	13.5	54	27	32	22	G3/4	12	G3/4	11	30	47	35

Ventil ručni kuglasti tip VS405

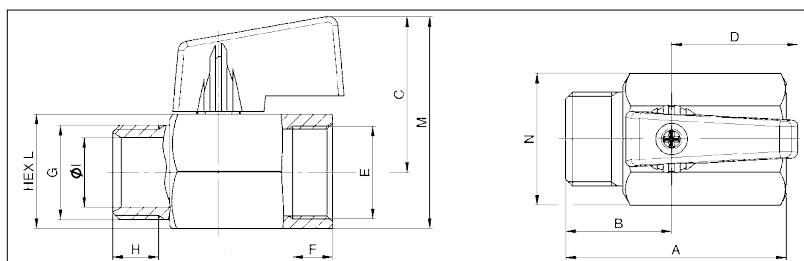

Model	Lager	DN	A	B	C	D	E	F	G	H	ØI	HEX L	M	N
VS405-1/8	✓	8	39	18	27	22	G1/8	8.5	G1/8	7	6.1	20	37	23
VS405-1/4	✓	8	39	18	27	22	G1/4	9	G1/4	8	8.2	20	37	23
VS405-3/8	✓	8	40	19	27	22	G3/8	10	G3/8	8	12.2	20	37	23
VS405-1/2	✓	10	45	21	29.5	22	G1/2	12	G1/2	10	15.2	24	41.5	28
VS405-3/4	✓	13.5	51	24	32	22	G3/4	12	G3/4	12	18.2	30	47	35