
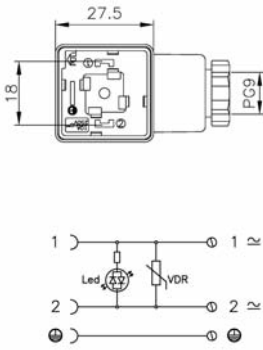
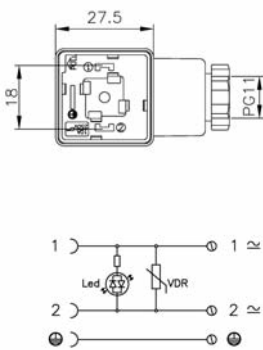
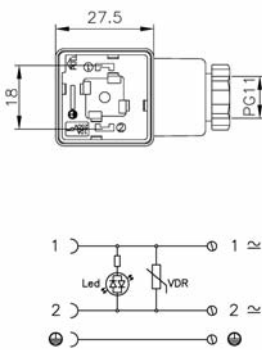


Valve Connectors KA1 series

SELF - ASSEMBLY CABLE

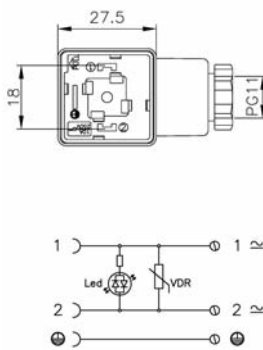

EN175301-803	EN175301-803	EN175301-803	EN175301-803
A	A	A	A
P18 connector with screw terminals NBR profile gasket (PE) earth position H12 function indicator (LED) and VDR protective circuit (varistor) transparent	P18 connector with screw terminals NBR profile gasket (PE) earth position H12 function indicator (LED) and VDR protective circuit (varistor) transparent	P18 connector with screw terminals NBR profile gasket (PE) earth position H12 function indicator (LED) and VDR protective circuit (varistor) transparent	P18 connector with screw terminals NBR profile gasket (PE) earth position H12 function indicator (LED) and VDR protective circuit (varistor) transparent
2+PE	2+PE	2+PE	2+PE
KA132V56T9	KA132V54T1	KA132V55T1	KA132V56T1
order no. KA132V59T9	order no. KA132V57T1	order no. KA132V58T1	order no. KA132V59T1
order no. KA132V5CT9	order no. KA132V5AT1	order no. KA132V5BT1	order no. KA132V5CT1
PG9 (M16x1,5 on request)	PG11	PG11	PG11
max. 1,5mm ² without splice/terminal	max. 1,5mm ² without splice/terminal	max. 1,5mm ² without splice/terminal	max. 1,5mm ² without splice/terminal
			
6,3 x 0,8mm ; 4,8 x 0,8mm	6,3 x 0,8mm ; 4,8 x 0,8mm	6,3 x 0,8mm ; 4,8 x 0,8mm	6,3 x 0,8mm ; 4,8 x 0,8mm
230 V AC/DC	24 V AC/DC	115 V AC/DC	230 V AC/DC
5 A	5 A	5 A	5 A
VDR 275 Vrms 8,6 Joule	VDR 30 Vrms 0,9 Joule	VDR 130 Vrms 4,5 Joule	VDR 275 Vrms 8,6 Joule
yellow	yellow	yellow	yellow
15mΩ max.	15mΩ max.	15mΩ max.	15mΩ max.
III	III	III	III
screw M3	screw M3	screw M3	screw M3
max. 0,5 N/m	max. 0,5 N/m	max. 0,5 N/m	max. 0,5 N/m
5 mm to 7 mm diameter	6 mm to 9 mm diameter	6 mm to 9 mm diameter	6 mm to 9 mm diameter
central screw M3x32,5	central screw M3x32,5	central screw M3x32,5	central screw M3x32,5
PA6 GF	PA6 GF	PA6 GF	PA6 GF
PA12	PA12	PA12	PA12
IP 65 when correctly assembled	IP 65 when correctly assembled	IP 65 when correctly assembled	IP 65 when correctly assembled
3	3	3	3
-20°C to + 80°C	-20°C to + 80°C	-20°C to + 80°C	-20°C to + 80°C
HB - UL 94	HB - UL 94	HB - UL 94	HB - UL 94
HB - UL 94	HB - UL 94	HB - UL 94	HB - UL 94
100 pieces / 2,5Kg	100 pieces / 2,5Kg	100 pieces / 2,5Kg	100 pieces / 2,5Kg
29 x 15 x 18 cm	29 x 15 x 18 cm	29 x 15 x 18 cm	29 x 15 x 18 cm
NBR flat gasket 100 pcs in bag	NBR flat gasket 100 pcs in bag	NBR flat gasket 100 pcs in bag	NBR flat gasket 100 pcs in bag
Silicon profile gasket 100 pcs in bag	Silicon profile gasket 100 pcs in bag	Silicon profile gasket 100 pcs in bag	Silicon profile gasket 100 pcs in bag
Stainless steel screw 100 pcs in bag	Stainless steel screw 100 pcs in bag	Stainless steel screw 100 pcs in bag	Stainless steel screw 100 pcs in bag

Form A - EN 175301-803 (DIN43650) / ISO 4400