


## Swivel flange SNGB for clevis foot LN/LSN

Material:

Die-cast aluminium

Ø 200: Steel

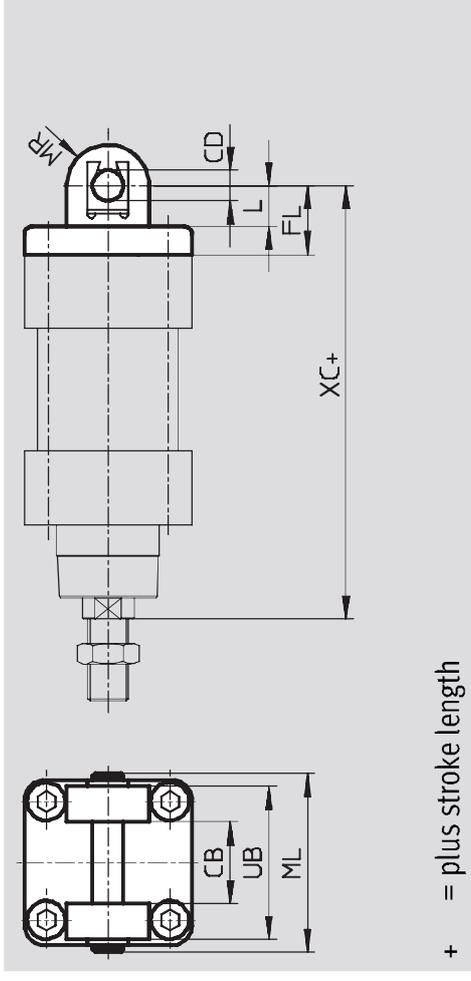

### Dimensions and ordering data

For Ø [mm]	CB Ø	CD Ø	FL	L	ML	MR	UB	XC	CRC <sup>1)</sup>	Weight [g]	Part No.	Type
32	26	10	22	13	55	10	45	142	2	125	<b>34 540</b>	<b>SNGB-32</b>
40	28	12	25	16	63	12	52	160	2	175	<b>34 541</b>	<b>SNGB-40</b>
50	32	12	27	16	71	12	60	170	2	243	<b>34 542</b>	<b>SNGB-50</b>
63	40	16	32	21	83	16	70	190	2	380	<b>34 543</b>	<b>SNGB-63</b>
80	50	16	36	22	103	16	90	210	2	610	<b>34 544</b>	<b>SNGB-80</b>
100	60	20	41	27	127	20	110	230	2	1,040	<b>34 545</b>	<b>SNGB-100</b>
125	70	25	50	30	148	25	130	275	2	1,750	<b>34 546</b>	<b>SNGB-125</b>
160	90	30	55	35	188	25	170	315	2	7,000	<b>34 547</b>	<b>SNGB-160</b>
200	90	30	60	35	188	25	170	335	2	11 000	<b>562 455</b>	<b>SNGB-200-B</b>
250	110	40	70	47	231	40	200	375	2	15 200	<b>157 512</b>	<b>SNGB-250</b>
320	120	45	80	52	253	45	220	420	2	26 450	<b>157 513</b>	<b>SNGB-320</b>

1) Corrosion resistance class 2 according to Festo standard 940 070

Components requiring moderate corrosion resistance. Externally visible parts with primarily decorative surface requirements which are in direct contact with a surrounding industrial atmosphere or media such as cooling or lubricating agents