

push-in fittings фитинги цанговые быстроразъёмные




AZC-G

Raccordo diritto maschio cilindrico

Straight male fitting, with cylindric thread

Ōeoē ía í? yííē n ōēē íă? e÷ane íē? ačúá íē e
óíē ío íeoăē ū íui e íē ū ō í

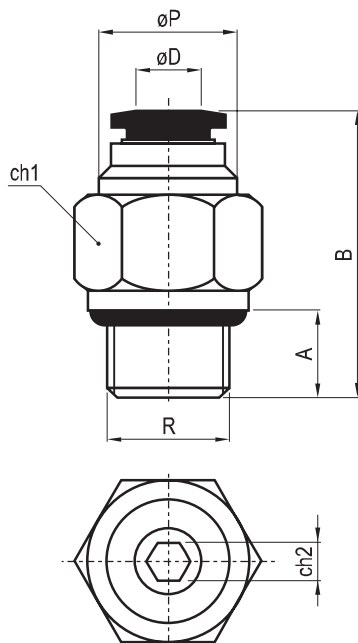


tubo (oD) <i>tube</i> ø ? óáea	R	oP	B	A	ch1	ch2	confez. <i>package</i> óíae.	codice <i>code</i> eíã
4	M5	10	19.6	4	10	2	10	36.800.0
4	G1/8"	10	19.4	5.5	14	3	10	36.801.0
4	G1/4"	10	20.1	7	17	3	10	36.802.0
6	M5	12	20	4	12	2	10	36.803.0
6	G1/8"	12	19.5	5.5	14	4	10	36.804.0
6	G1/4"	12	21.8	7	17	4	10	36.805.0
6	G3/8"	12	19.3	7.5	20	4	10	36.806.0
8	G1/8"	14	25	5.5	14	5	10	36.807.0
8	G1/4"	14	23.5	7	17	6	10	36.808.0
8	G3/8"	14	20.5	7.5	20	6	10	36.809.0
8	G1/2"	14	24	10	24	6	10	36.810.0
10	G1/8"	17	28.5	5.5	14	5	10	36.811.0
10	G1/4"	17	30	7	17	6	10	36.812.0
10	G3/8"	17	27	7.5	20	8	10	36.813.0
10	G1/2"	17	30	10	24	8	10	36.814.0
12	G1/4"	20	32	7	17	6	10	36.815.0
12	G3/8"	20	28	7.5	20	8	10	36.816.0
12	G1/2"	20	30.5	10	24	8	5	36.817.0
16	G1/4"	25	34.2	7	24	8	5	36.818.0
16	G3/8"	25	35	7.5	24	8	5	36.819.0
16	G1/2"	25	38	10	24	10	5	36.820.0

AZOC-G

Raccordo diritto maschio cilindrico con esagono per chiave
incassato

Straight male fitting, with cylindric thread and internal key hexagon

Ôeoēa i? yīē n öēēā? e+aneīē ? aḡuāīē e āīóo? aīīei
oanoēáīēüīēēīāēy eē? ÷a

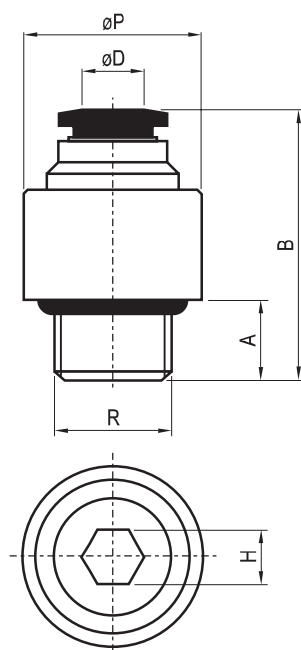

tubo (oD) <i>tube</i> o ? óaea	oR	oP	B	A	H	confez. <i>package</i> óiae.	codice <i>code</i> eĩa
4	M5	10	19.6	4	2	10	36.1130.0
4	G1/8"	14	19.4	5.5	3	10	36.1131.0
4	G1/4"	17	20.1	7	3	10	36.1132.0
6	M5	12	20	4	2	10	36.1133.0
6	G1/8"	14	20	5.5	4	10	36.1134.0
6	G1/4"	17	22.3	7	4	10	36.1135.0
6	G3/8"	20	19.3	7.5	4	5	36.1136.0
8	G1/8"	14	25	5.5	4	10	36.1137.0
8	G1/4"	17	23.5	7	6	10	36.1138.0
8	G3/8"	20	20.5	7.5	6	5	36.1139.0
8	G1/2"	24	24	10	6	5	36.1140.0
10	G1/8"	17	28.5	5.5	5	10	36.1141.0
10	G1/4"	17	30	7	6	10	36.1142.0
10	G3/8"	20	27	7.5	8	5	36.1143.0
10	G1/2"	24	30	10	8	5	36.1144.0
12	G1/4"	20	32.5	7	6	5	36.1145.0
12	G3/8"	20	28.5	7.5	8	5	36.1146.0
12	G1/2"	24	31	10	8	5	36.1147.0