


Threaded fittings

Technical data

FESTO

Double nipple E
with 2 sealing rings

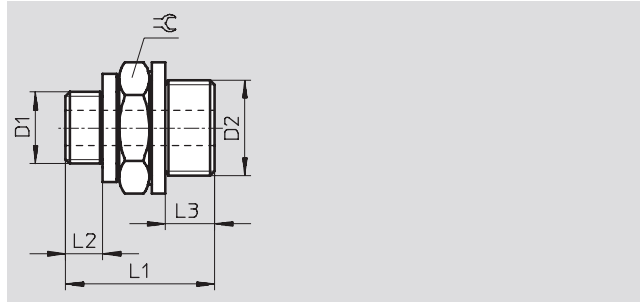

Dimensions and ordering data										
Connection		Nominal size	L1	L2	L3	⌀	Weight/piece [g]	Part No.	Type	PU*
D1	D2									
M thread – High-alloy steel										
M3	M3	1.7	10	2.8	2.8	4.5	1	30 987	E-M3-M3-Sg ^{1) 2)}	10
M thread – Steel										
M5	M5	2.5	12.6	3.8	3.8	7	2	4 139	E-M5-M5 ²⁾	10
	G ¹ / ₈	2.5	15.3	3.8	4.9	13	1	4 138	E-M5- ¹ / ₈ ²⁾	10
								534 204	E-M5- ¹ / ₈ -100 ²⁾	100
G thread – Aluminium										
G ¹ / ₈	G ¹ / ₈	4.5	17	4.9	4.9	13	1	3 573	E- ¹ / ₈ - ¹ / ₈ ²⁾	10
	G ¹ / ₄	4.5	19.5	4.9	5.8	17	1	3 574	E- ¹ / ₈ - ¹ / ₄ ²⁾	10
								534 205	E- ¹ / ₈ - ¹ / ₄ -100 ²⁾	100
G ¹ / ₄	G ¹ / ₄	6.5	21	5.8	5.8	17	1	3 575	E- ¹ / ₄ - ¹ / ₄ ²⁾	10
	G ³ / ₈	6.5	22	5.8	6.8	19	10	3 576	E- ¹ / ₄ - ³ / ₈ ²⁾	10
								534 206	E- ¹ / ₄ - ³ / ₈ -50 ²⁾	50
G ³ / ₈	G ³ / ₈	9.0	23	6.8	6.8	19	10	3 578	E- ³ / ₈ - ³ / ₈ ²⁾	10
	G ¹ / ₂	9.0	26.5	6.8	8.15	24	20	3 579	E- ³ / ₈ - ¹ / ₂ ²⁾	1
								534 207	E- ³ / ₈ - ¹ / ₂ -20 ²⁾	20
G ¹ / ₂	G ¹ / ₂	13.0	28	8.15	8.15	24	20	3 580	E- ¹ / ₂ - ¹ / ₂ ²⁾	1
	G ³ / ₄	13.0	30.5	8.5	9.05	32	35	3 582	E- ¹ / ₂ - ³ / ₄ ²⁾	1
G ³ / ₄	G ³ / ₄	18.0	32	9.5	9.05	32	30	3 584	E- ³ / ₄ - ³ / ₄ ²⁾	1
M thread – Brass										
M7	G ¹ / ₈	4.5	17.7	5.3	4.9	13		534 148	E-M7- ¹ / ₈ -MS	10
G thread – Brass										
G ¹ / ₈	G ¹ / ₈	4.5	17	4.9	4.9	13	10	15 621	E- ¹ / ₈ - ¹ / ₈ -MS	10
	G ¹ / ₄	4.5	19.5	4.9	5.8	17	20	15 622	E- ¹ / ₈ - ¹ / ₄ -MS	10
	G ³ / ₈	5.3	20.4	4.9	6.8	19	25	534 150	E- ¹ / ₈ - ³ / ₈ -MS	10
G ¹ / ₄	G ¹ / ₄	6.5	21	5.8	5.8	17	20	15 623	E- ¹ / ₄ - ¹ / ₄ -MS	10
	G ³ / ₈	6.5	22	5.8	6.8	19	30	15 624	E- ¹ / ₄ - ³ / ₈ -MS	10
	G ¹ / ₂	8	25.5	5.8	8.15	24	30	534 149	E- ¹ / ₄ - ¹ / ₂ -MS	10
G ³ / ₈	G ³ / ₈	9	23	6.8	6.8	19	30	15 625	E- ³ / ₈ - ³ / ₈ -MS	10
	G ¹ / ₂	9	26.5	6.8	8.15	24	53	15 626	E- ³ / ₈ - ¹ / ₂ -MS	1
G ¹ / ₂	G ¹ / ₂	13	28	8.15	8.15	24	52	15 627	E- ¹ / ₂ - ¹ / ₂ -MS	1
	G ³ / ₄	13	30.5	8.15	9.05	32	100	15 628	E- ¹ / ₂ - ³ / ₄ -MS	1
G ³ / ₄	G ³ / ₄	18	32	9.05	9.05	32	100	15 629	E- ³ / ₄ - ³ / ₄ -MS	1

1) Corrosion and acid resistant version
2) Free of copper and PTFE

* Packaging unit quantity