



Push-in fittings QS-V0, Quick Star, flame-retardant

FESTO

Technical data

Push-in fitting QS-V0

Male thread
with external hex

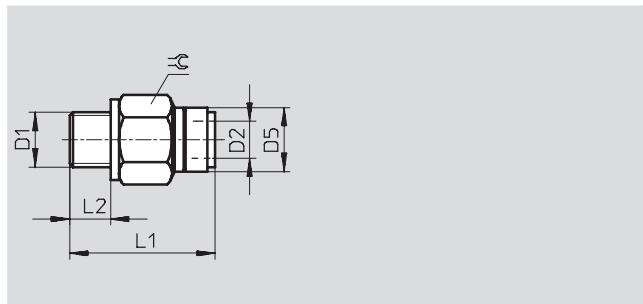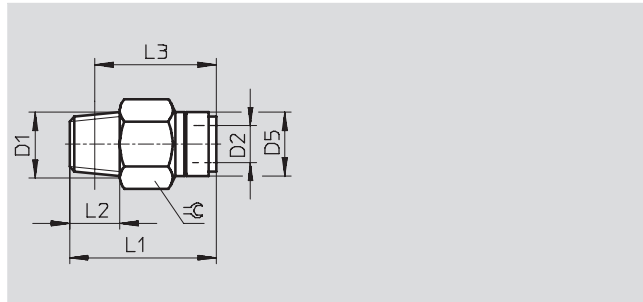

Dimensions and ordering data											
Connection	Nominal size	Tubing O.D.	D5 Ø	L1	L2	L3	≈	Weight/ piece [g]	Part No.	Type	PU*
D1	[mm]	D2									
R thread											
R1/8	4	6	14	28	8	24	12	10	160 500	QS-V0-1/8-6	10
	5	8	16	33.5	8	29.5	14	16.5	160 501	QS-V0-1/8-8	10
R1/4	4	6	14	30	11	24	14	18	160 502	QS-V0-1/4-6	10
	5	8	16	32	11	26	14	16.5	160 503	QS-V0-1/4-8	10
	6.7	10	19	35.5	11	29.5	17	21.5	160 504	QS-V0-1/4-10	10
	6.7	12	22	41.5	11	35.5	21	44	160 505	QS-V0-1/4-12	10
R3/8	5	8	16	29.5	12	23	17	25	160 506	QS-V0-3/8-8	10
	6.7	10	19	35	12	28.5	17	27.5	160 507	QS-V0-3/8-10	1
	8.7	12	22	37.5	12	31	21	45	160 508	QS-V0-3/8-12	1
R1/2	6.7	10	19	36	15	28	21	50.5	160 509	QS-V0-1/2-10	1
	8.7	12	22	39.5	15	31.5	21	68	160 510	QS-V0-1/2-12	1
G thread with sealing ring											
G1/8	4	6	14	26.6	5.1	–	13	9.8	186 314	QS-V0-G1/8-6	10
	5	8	16	31.9	5.1	–	14	15	186 315	QS-V0-G1/8-8	10
G1/4	4	6	14	27.1	5.6	–	17	19	186 316	QS-V0-G1/4-6	10
	5	8	16	27.9	5.6	–	17	17	186 317	QS-V0-G1/4-8	10
	6.7	10	19	34.9	5.6	–	17	23	186 318	QS-V0-G1/4-10	10
	6.7	12	22	40.2	5.6	–	21	52	186 319	QS-V0-G1/4-12	10
G3/8	5	8	16	27.6	6.6	–	19	25	186 320	QS-V0-G3/8-8	10
	6.7	10	19	31.4	6.6	–	19	26	186 321	QS-V0-G3/8-10	10
	8.7	12	22	37.6	6.6	–	21	39	186 322	QS-V0-G3/8-12	10
G1/2	6.7	10	19	32	7.6	–	24	53	186 323	QS-V0-G1/2-10	1
	8.7	12	22	34.1	7.6	–	24	48	186 324	QS-V0-G1/2-12	1

* Packaging unit quantity