


Threaded fittings

Technical data

Pipe coupling sleeve QM

Material:
Blue anodised aluminium
QM-M5-M5:
Steel

Note on materials:
Free of copper and PTFE
Conforms to RoHS

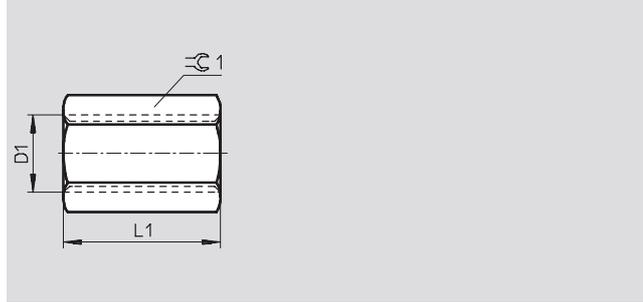


Dimensions and ordering data							
Connection	L1	$\varnothing 1$	Weight/piece [g]	Part No.	Type	PU*	
M5	12	7	1	3 560	QM-M5-M5	10	
G $\frac{1}{8}$	22	13	6	2 254	QM- $\frac{1}{8}$ - $\frac{1}{8}$	10	
G $\frac{1}{4}$	26	17	9	2 255	QM- $\frac{1}{4}$ - $\frac{1}{4}$	10	
G $\frac{3}{8}$	32	22	19	2 256	QM- $\frac{3}{8}$ - $\frac{3}{8}$	10	
G $\frac{1}{2}$	36	27	31	2 257	QM- $\frac{1}{2}$ - $\frac{1}{2}$	1	
G $\frac{3}{4}$	36	32	36	4 226	QM- $\frac{3}{4}$ - $\frac{3}{4}$	1	
G1	40	41	80	9 968	QM-1-1	1	

* Packaging unit quantity

Pipe coupling sleeve QM with sealing ring

Material:
Blue anodised aluminium
QM-M5-A/I:
Steel

Note on materials:
Free of copper and PTFE

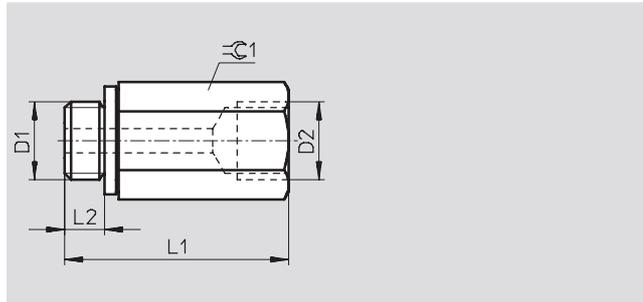

Dimensions and ordering data								
Connection	D2	L1	L2	$\varnothing 1$	Weight/piece [g]	Part No.	Type	PU*
M5	M5	18.5	3.8	7	4	36 169	QM-M5-A/I	10
G $\frac{1}{8}$	G $\frac{1}{8}$	25.6	4.9	13	7	36 170	QM- $\frac{1}{8}$ -A/I	10
G $\frac{1}{4}$	G $\frac{1}{4}$	36	5.8	17	15	36 171	QM- $\frac{1}{4}$ -A/I	10
G $\frac{3}{8}$	G $\frac{3}{8}$	37.8	6.8	19	16	36 172	QM- $\frac{3}{8}$ -A/I	10
G $\frac{1}{2}$	G $\frac{1}{2}$	49	8.15	24	36	187 387	QM- $\frac{1}{2}$ -A/I	1

* Packaging unit quantity