

11.076.4

The diagram shows a vertical assembly. At the top is a piston with a V-shaped top, labeled 'X'. Below it is a cylinder. A horizontal line with arrows pointing outwards is labeled '1' on the left and '2' on the right. Below this line is a spring. The entire assembly is supported by a base.

11.077.4

The diagram shows a vertical cylinder with a piston inside. The piston is a horizontal bar with a central vertical rod passing through it. The rod is labeled 'X' at the top. The piston is connected to a spring at the bottom. The cylinder is labeled '1' on the left and '2' on the right. The piston is labeled '3'.

[illegible]

Materials

Main body: aluminium 11S

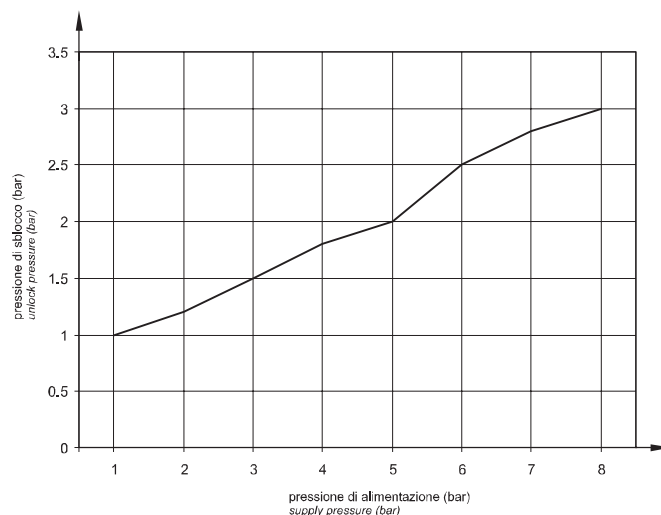
Lower body: aluminium 11S

Springs: stainless steel

Seals: *NBR*

Internal parts: brass OT58

Pressione di sblocco in funzione della pressione di alimentazione.
Unlock pressure related to supply pressure.

255